Volumetric Filter

ULTIMATE FILTER PERFORMANCE

For residential and semi-commercial pools





Product **Features**

Tank Material

HDPF

Max Operating Pressure

58 psi / 4 bar

Max Temperature

50°C (122°F)

Suggested Size of Media

0.5-0.8mm

Volumetric Filter

ENGINEERED FOR THE DIFFERENCES

The one-piece blow molded tank combines the technologies of structural engineering for high-density polyethylene material with manufacturing processes to maximize the strength of the filter. It is perfectly suited for all pools with different disinfection systems (Salt chlorinator, Ozone, UV, and chemical dosing).

The Volumetric Filter is designed for the best clarity of filtered water and has an outstanding pressure standard among the market benchmarks.

The filter incorporates a multiport valve manufactured from robust components to create the most efficient, reliable, and user-friendly filter positioning it in the market for the best return on investment.

Advantages

Better Water: 30% more volume of filtration bed compared to other filters in the market improves the filtration quality.

Less Backwash: The high volume of filtration bed allows the filter to trap more dirt and as a result, less frequency of backwash is required.

User-friendly: Easy to install, maintain and replace. Affordable spare parts available.

High compatibility: High compatibility: The filter and its components are compatible with all different kinds of pool applications.

Robust Performance: HDPE filter body provides the best protection under any extreme weather conditions.

Volumetric Filter is equipped with:

- 1. 6-way clamp style multiport valve (1.5"MPV07, 2"MPV08)
- 2. universal standard of union connection
- 3. pressure gauge
- 4. ABS lateral system






Product Dimension:

Model	A mm	B mm	C mm	
T450	964	457	353	
T500	1040	508	400	
T600	1090	610	457	
T700	1180	711	516	
T600B	1142	610	457	
T700B	1232	711	516	

Technical Information

Code	Model	Filter Area (m²)	Valve Connections	Max Flow Rate	Sand (kg)
88016003	T450	0.16	1.5" / 50mm	8.0m³/h	75
88016004	T500	0.20	1.5" / 50mm	10.0m³/h	95
88016046	T600	0.29	1.5" / 50mm	14.6m³/h	165
88016007	T700	0.39	1.5" / 50mm	19.5m³/h	200
88016047	T600B	0.29	2.0" / 63mm	14.6m³/h	165
88016008	T700B	0.39	2.0" / 63mm	19.5m³/h	200

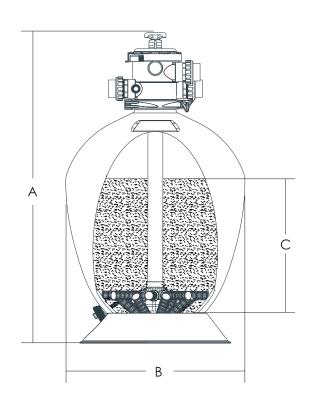

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS G/F 41 TIN HAU TEMPLE ROAD,
NORTH POINT, HONG KONG
PHONE +852 2832 9880
www.emauxgroup.com



Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

© 2018 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.