


مشخصات الکتروموتور

MODEL	POWER INPUT SD HP	P1 MAX kW	P2 NOMINAL		In A	MOTOR TYPE	I st A	r/min	CAPACITOR	
			HP	HP					μF	V _c
KV 2/10 M	1500-1400 ~	1.17	1.1	4.5	13	—	20	2800	31.5	400
KV 2/10 T	1500-1400 ~	1.8	1.1	1.5	14	BT	23	2800	—	—
KV 2/12 M	1500-1400 ~	1.38	1.3	2	18	—	38	2700	40	400
KV 2/12 T	1500-1400 ~	1.88	1.3	2	15.4	BT	20	2700	—	—
KV 2/15 M	1500-1400 ~	2.2	1.88	2.5	11.3	—	46	2800	40	400
KV 2/15 T	1500-1400 ~	2.8	1.88	2.5	7.9-4.2	BT	17-23	2800	—	—
KV 2/18 T	1500-1400 ~	2.2	2.2	3	10-6.8	BT	19-40	2800	—	—

ابعاد و اندازه

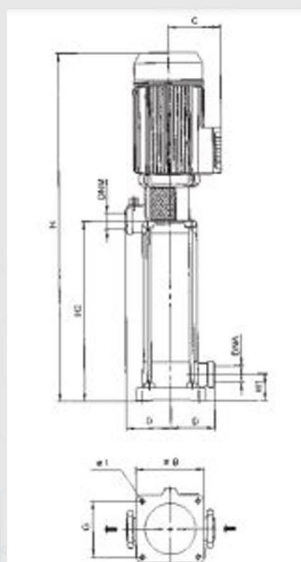

MODEL	H	C	D	G	I	H	H1	H2	D1A	D1M	PACKING DIMENSIONS			VOLUME m³	WEIGHT kg
											LA	LB	H		
KV 2/10 M	55	91	106	137	31	135	80	403	714	714	67	226	226	1002	27.2
KV 2/10 T	55	91	106	137	31	135	80	403	714	714	67	226	226	1002	28.1
KV 2/12 M	55	96	106	137	31	140	80	556	714	714	67	226	226	1002	26.6
KV 2/12 T	55	91	106	137	31	140	80	556	714	714	67	226	226	1002	28
KV 2/15 M	55	96	106	137	31	140	80	602	714	714	123	226	226	1006	30
KV 2/15 T	55	96	106	137	31	140	80	602	714	714	123	226	226	1006	29.8
KV 2/18 T	102	146	106	137	31	198	80	728	714	714	123	226	226	1005	35.5