

گروه بازرگانی پایا گسترش خورشید تابان

گروه بازرگانی پایا گسترش خورشید تابان با در اختیار داشتن بیش از دو دهه سابقه حرفه ای در زمینه ماشین آلات صنعتی و سیستم های آبرسانی و آتشنشانی، تجهیزات استخر، سونا و جکوزی، اقدام به فعالیت در زمینه های مختلف واردات و تولید و فروش مستقیم به بازار مشتریان، توانسته است به عنوان مجموعه ای کامل با بیش از ۴۵ کارگروه متخصص، متعهد و کارآزموده در خدمت شما مشتریان گرانقدر باشد. لذا این مجموعه با داشتن کارخانجات تولیدی و انبار مرکزی و فروشگاه و در نهایت دفتر مرکزی خود به این امر مبذول گردیده است که کالاها را با بهترین قیمت و کیفیت اصلی به دست شما عزیزان برساند.



WWW.PAYAGOSTARESH.IR

"EM" Series Fiberglass Top Mount Filter


3



EM400-700

EMQ400-700

Bobbin-wound fiberglass reinforced tank is still the most popular standard in the industry after all. With UV resistant surface finished, it is able to operate under prolong sunlight for years of reliability. EM series filters are equipped with a six-position, clamp and screw styles multi-port valve and ABS laterals.



Highlight Features:

- Max operating pressure 43.5psi/3bar
- Max temperature of 50°C (122°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm



EM750-1400

Technical Characteristics

Model	Filter Area(m ²)	Valve Connection	Max Flow Rate	Gravel(kg)	A mm	B mm
EM400	0.13	1.5 inch 50mm	8 m ³ /h	35	720	400
EM450	0.16	1.5 inch 50mm	10 m ³ /h	45	770	450
EM500	0.22	1.5 inch 50mm	12 m ³ /h	85	840	525
EM600	0.30	1.5 inch 50mm	16 m ³ /h	150	960	625
EM700	0.40	1.5 inch 50mm	20 m ³ /h	210	1040	700
EM700B	0.40	2.0 inch 63mm	21 m ³ /h	215	1080	700
EM750	0.45	2.0 inch 63mm	23 m ³ /h	300	1100	750
EM800	0.50	2.0 inch 63mm	25 m ³ /h	355	1210	800
EM900	0.64	2.0 inch 63mm	31 m ³ /h	470	1270	900
EM1000	0.79	2.0 inch 63mm	36 m ³ /h	620	1360	1000
EM1100	0.96	2.0 inch 63mm	42 m ³ /h	800	1400	1100
EM1200	1.13	2.0 inch 63mm	45 m ³ /h	900	1420	1200
EM1400	1.54	2.0 inch 63mm	56 m ³ /h	1350	1750	1400

Note: For reference only




PV01-1/PV02-2



PS03-3/PS04-4

Functions: 6-Way Multiport Valve

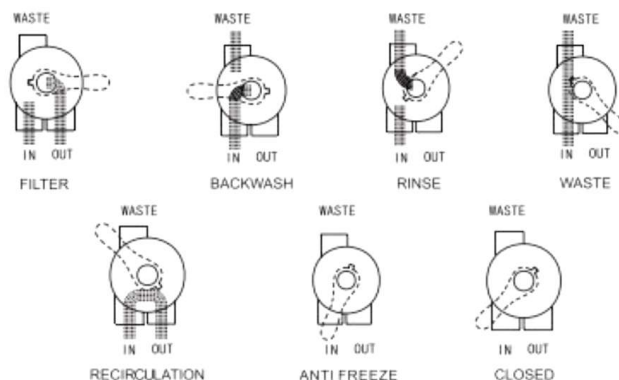


Model	PV01-1	PV02-2	PS03-3	PS04-4
Size	1.5" Top mount	2.0" Top mount	1.5" Side mount	2.0" Side mount

“EMS” Series Fiberglass Side Mount Filter



EMS500-700

Bobbin-wound fiberglass reinforced tank is still the most popular standard in the industry after all. With UV-resistant surface finished, it is able to operate under prolong sunlight for years of reliability. “EMS” series filters are equipped with a six position, clamp and screw styles multi-port valve and ABS laterals.

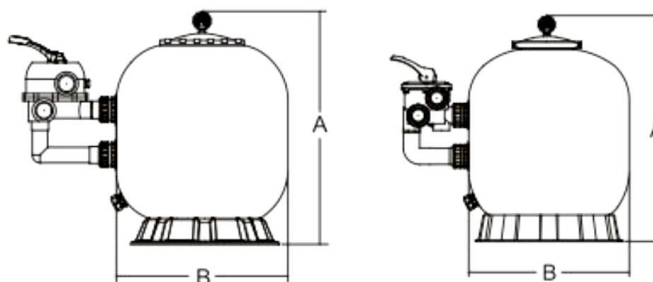

Highlight Features:

- Max operating pressure 43.5psi/3bar
- Max temperature of 50°C (122°F)
- Universal standard of union connection provided
- Suggested size of media: 1-2mm



EMS750-1400

Technical Characteristics

Model	Filter Area(m ²)	Valve Connection		Max Flow Rate	Gravel(kg)	A mm	B mm
EMS500	0.22	1.5 inch	50mm	12 m ³ /h	85	690	525
EMS600	0.30	1.5 inch	50mm	16 m ³ /h	150	790	625
EMS700	0.40	1.5 inch	50mm	20 m ³ /h	210	890	700
EMS700B	0.40	2.0 inch	63mm	21 m ³ /h	215	930	700
EMS750	0.45	2.0 inch	63mm	23 m ³ /h	300	950	750
EMS800	0.50	2.0 inch	63mm	25 m ³ /h	355	1060	800
EMS900	0.64	2.0 inch	63mm	31 m ³ /h	470	1120	900
EMS1000	0.79	2.0 inch	63mm	36 m ³ /h	620	1210	1000
EMS1100	0.96	2.0 inch	63mm	42 m ³ /h	800	1290	1100
EMS1200	1.13	2.0 inch	63mm	45 m ³ /h	900	1310	1200
EMS1400	1.54	2.0 inch	63mm	56 m ³ /h	1350	1600	1400

Note: For reference only

